ELITE ROBOTS


25 kg | 1500 mm | ±0.08 mm

CS625


CS SERIES




CS625 Dimension

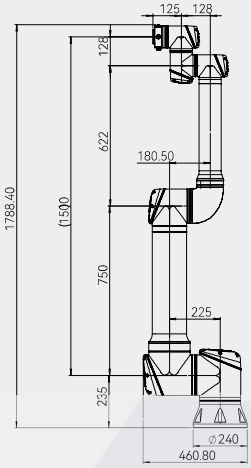




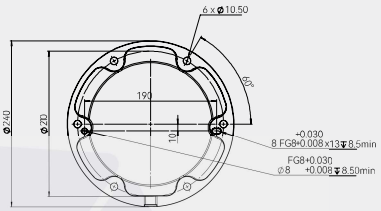


CS625 Working Area
Top View

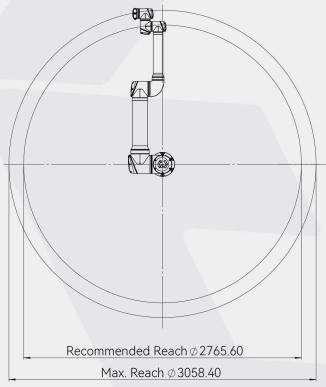

CS625 Working Area
Side View

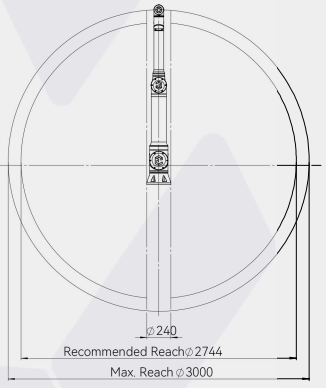

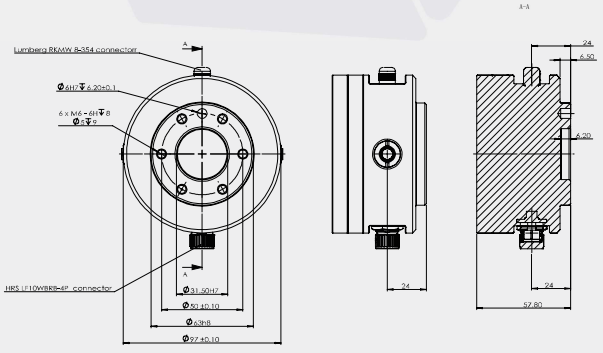

Robotic Arm

Payload		25kg
Radius		1500mm
Accuracy		±0.08mm
Axis		6
Joints rotation	J1-J6	±360°
Joints speed	J1-J2	125°/s
	J3	150°/s
	J4-J6	210°/s
Typical TCP Speed		2.0 m/s
IP rating		IP65 (optional IP68)
Temperature range		-10~50℃
Relative humidity		<90% (non-condensing)
Noise reduction		<70db
Typical power usage		625w
Mounting		Any angle
Tool I/O connector		T1: M8, 8pin T2: Ø 12.8mm, 4pin
Tool I/O ports		4 config. DI / DO; 1 AI, 1 AO
Tool I/O power supply		T1: 0 / 12V / 24V; 3A / 2A / 1A T2: 24 V; 5A
Tool I/O communication		RS485
Footprint		Ø 240 mm
Weight		58 kg
Material		Aluminum, steel, plastic, rubber
Cable length		5.5m*
Certifications		ISO 13849, ISO 10218, ISO/TS 15066, ISO 14644 cleanroom class 5, RoHS; SEMI-S2; UL, CE, KCs
Programming		Python-script, graphical proprietary user interface, free-drag/offline programming

** Optional cable lengths of 1.5m, 3m and 10m and additional extensions up to 10m are available.*



Featuring the same architecture as CS620, the CS625 is the cobot with the highest payload of the entire CS series. Yet, with a weight of only 58kg and an ultra-compact 240mm footprint (the same as CS620), this collaborative robot ensures broad versatility on any work floor.

Standard controller

Model	ERB3C300	ERB3C600	ERB3C2K0
Type	Standard AC		
I/O interface	16 x DI (PNP/NPN switch), 16 x DO; 8 x CI (PNP/NPN switch), 8 x CO; 2 x AI, 2 x AO, 4 x High-Speed DI		
I/O Power Supply	24V/2A		
Communication interface	Ethernet TCP/IP, UDP, Modbus TCP/RTU, RS485/RS232, Profinet slave, Ethernet/IP slave, CCLink slave (optional)		
Dimensions (W x H x D)	505mm × 447mm × 257mm		
Protection level	IP44		
Weight	15kg		
Power source	100~240VAC, 50~60Hz		
Operating temperature	0°C~50°C	-10°C~50°C	0°C~50°C
Ambient humidity	90%		
Material	Aluminum alloy, steel		



The CS standard controller features a compact and maintenance-friendly design (three-modules safety IO card and screw-lock fastener). It integrates a holder to optionally attach the TP.

Mini controller

Model	ERB1C600ME-Mini
Type	DC MINI
I/O interface	8 x DI, 8 x DO; 8 x CI (PNP/NPN switch), 8 x CO; 2 x AI, 2 x AO
I/O Power Supply	24V/2A
Communication interface	Ethernet, Profinet slave, Ethernet/IP slave, FINS TCP, Modbus TCP/RTU, RS485, CCLink slave (optional)
Dimensions (W x H x D)	164.2mm × 130mm × 72mm
Protection level	IP20
Weight	1.5kg
Power source	45~55VDC
Operating temperature	-10°C~50°C
Ambient humidity	90%
Material	Aluminum alloy, steel




The MINI controller stands out for its very low weight and compact dimensions, ensuring maximum flexibility and integrability for integrators, OEM partners, and users who want to create their own custom design.

Teach Pendants

Model	ERP500 (standard)	ERP500S (optional)
Dimensions (W x H x D)	304mm x 169mm x 93mm	
Resolution	1280 x 800	
Screen size	10.1“	
Front buttons	12 motion-control buttons; 2 speed-adjustment buttons	
Rear button	Free-drive programming	3-position enable key
IP protection level	IP54	
Weight	0.96 kg	
Cable length	5.5 m	
Operating temperature	-10°C~50°C	
Ambient humidity	95%	
Material	Aluminum alloy, plastic, silicone rubber	



The standard ERP500 TP integrates a rear button for convenient free-drive programming



Featuring the same front design as the ERP500, the optional ERP500S TP integrates a rear 3-modes enable key for enhanced safety