


Dry Areas - Static Dissipative Mats

ESD Protective Mats


Static dissipative anti-fatigue mats protect against static shocks while providing comfort for standing workers derived from a thick worker platform with vinyl sponge base for fatigue relief. Bevelled edges on all four sides to minimize risk of tripping.

Specifications:

- Meets IEC61340-4-1 (category D1F), measured resistance $R_g 10^6 - 10^9 \Omega$, $R_p 10^6 - 10^9 \Omega$.
- Electrostatic charge (walking test), meets ISO6356 and EN1815.
- Free of DOP, free of DMF, free of ozone depleting substances, free of silicone and free of heavy metals.
- Compatible with ESD Accessories on page 54/55.

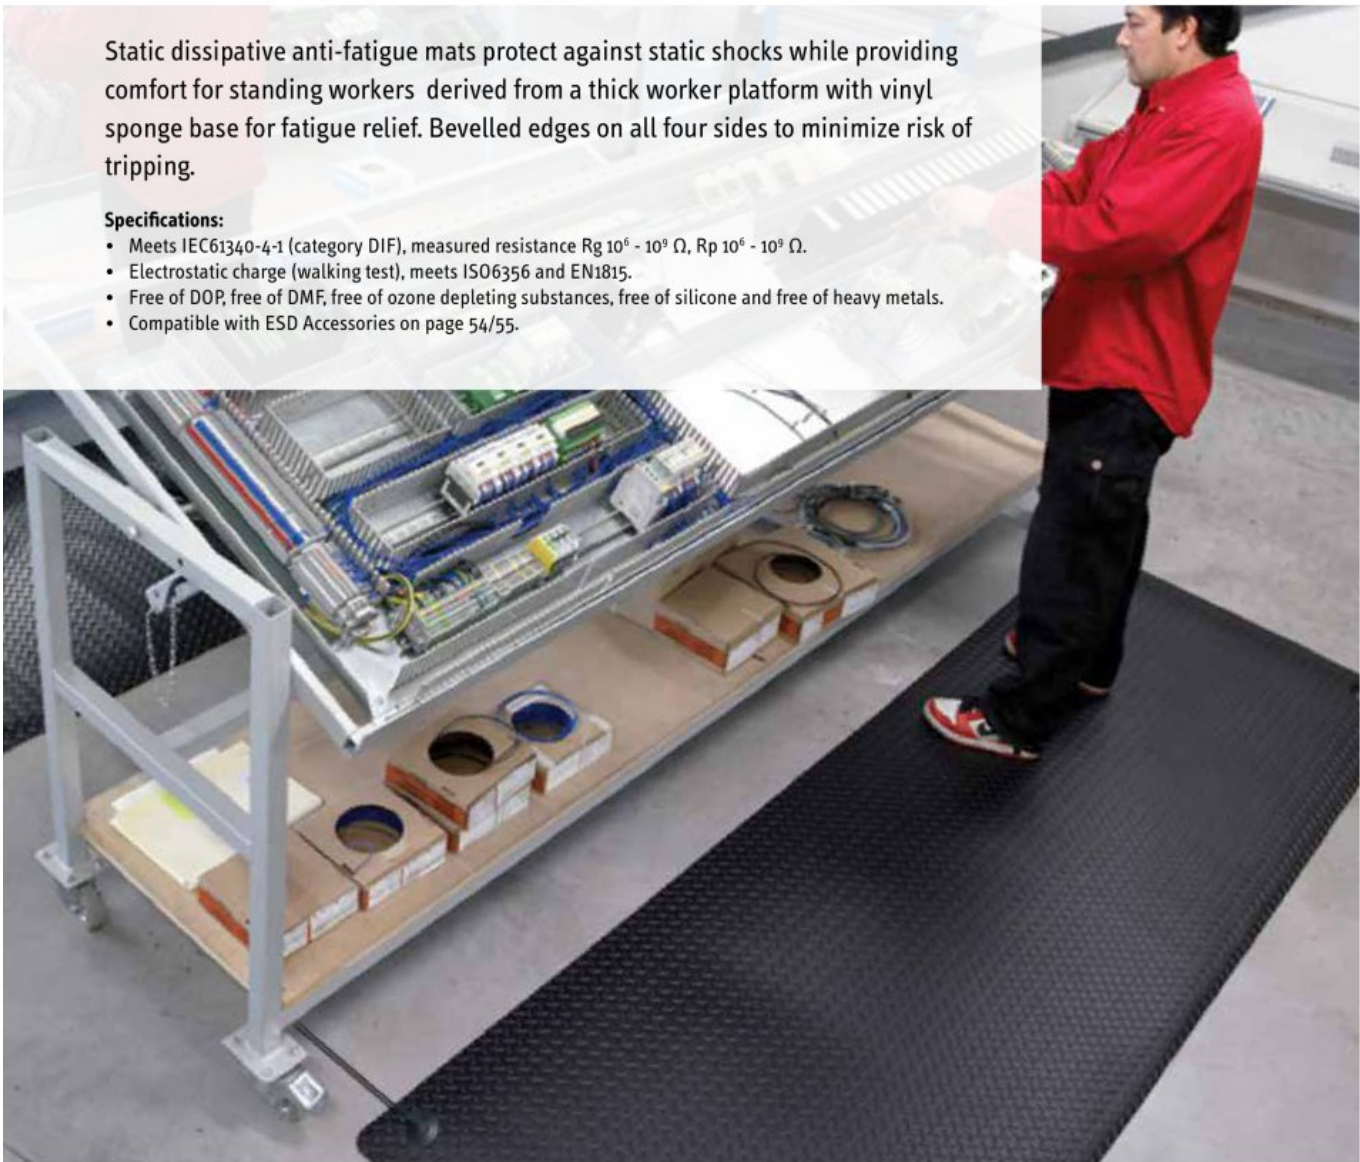


463 Skywalker HD™ ESD




Page 27

464 Skywalker HD™ ESD FR



Page 27

558 Cushion Ease™ ESD



Page 21

661S Cushion Ease™ ESD FR



Page 21

826 Diamond Stat™

Ergonomic benefit derived from 14 mm thick worker platform of a static dissipative combination of tough top surface laminated onto a comfortable sponge base for maximum durability coupled with fatigue relief. Equipped with 10 mm female socket attached to the mat and grounding cord. Diamond deck plate surface provides traction and allows easy twist turns. Featured with RedStop™ slip resistant backing to prevent mats from shifting. UniFusion™ technology, engineered to resist in the harshest work environments.

Specifications:

- 4.7 mm static dissipative PVC top surface permanently bonded onto a 9.3 mm resilient backing of microcellular vinyl
- Overall thickness: 14 mm
- Weight: 6.5 kg per m²
- Fire classification Cfl-S1 tested according to EN 13501

Recommended uses:

- Heavy duty - dry industrial environments

Colours:

- Black

Full rolls 22.8 m:

- 91 cm x 22.8 m
- 122 cm x 22.8 m

Stock sizes:

- 91 cm x 150 cm
- 91 cm x 3 m

Custom lengths:

- 91 cm per linear meter
- 122 cm per linear meter



PRODUCT TESTING



825 Cushion Stat™

Ergonomic benefit derived from 9.4 mm thick worker platform of a static dissipative vinyl sponge that reduces fatigue and static build-up. Pebble pattern provides non-directional traction and is easy to clean. Optional 10 mm female socket attached to the mat for connection with optional grounding cord.

Specifications:

- Static dissipative vinyl sponge
- Overall thickness: 9.4 mm
- Weight: 3 kg per m²

Stock sizes:

- 91 cm x 150 cm

Full rolls 18.3 m:

- 91 cm x 18.3 m

Recommended uses:

- Light duty - dry areas

Custom lengths:

- 91 cm per linear meter

Colours:

- Black/yellow, Black, Grey



PRODUCT TESTING



457 Skystep™ ESD



452 Skywalker® PUR ESD



453 Skywalker® II PUR ESD

