



Justrite Safety Group

Dry Areas - Medium duty

# 413 Gripper Sof-Tred™



413 GRIPPER SOF-TRED™

Dry Areas - Medium duty

# 413 Gripper Sof-Tred™

Lengthwise corrugated rib pattern for sure footing. Exceptional worker comfort due to 12.7 mm thick specially formulated compound. Protective layer of exclusive Dyna-Shield™ extends service life by 50% compared to regular microcellular vinyl\*.

Available with yellow borders along sides comply with OSHA code 1910-144. All 4 sides are bevelled and sealed to minimize tripping hazards.

#### Recommended use:

- Medium duty
- Industrial
- For placement in manufacturing plants, assembly lines, picking, packing and logistics warehouses, individual work stations.

#### Specifications:

- Microcellular vinyl
- Backing: Microcellular PVC foam
- Bevelled edges on all sides
- Overall thickness: 12,7 mm
- Weight: 4 kg/m<sup>2</sup>
- Slip rating: R10
- Free of DOP, free of DMF, free of ozone depleting substances, free of silicone and free of heavy metals

#### Standard sizes:

- 60cm x 91cm
- 91cm x 150cm

#### Full rolls:

- 60cm x 18.3m
- 91cm x 18.3m
- 122cm x 18.3m

#### Custom lengths:

- 60cm x linm
- 91cm x linm
- 122cm x linm

#### Colours:

- Black/Yellow, Grey

#### Cleaning instructions:

- Daily sweeping with a brush



#### PRODUCT TESTING




## 413 Gripper Sof-Tred™ (black/yellow)

Art. nr.	Dimensions	Weight kg
413S0023BY	60cm x 91cm	2,1
413S0035BY	91cm x 150cm	5,3
413R0024BY	60cm x 18.3m	43
413R0036BY	91cm x 18.3m	64
413R0048BY	122cm x 18.3m	86
413C0024BY	60cm x linm	2,3
413C0036BY	91cm x linm	3,5
413C0048BY	122cm x linm	4,7



## 413 Gripper Sof-Tred™ (grey)

Art. nr.	Dimensions	Weight kg
413S0023GY	60cm x 91cm	2,1
413S0035GY	91cm x 150cm	5,3
413R0024GY	60cm x 18.3m	43
413R0036GY	91cm x 18.3m	64
413R0048GY	122cm x 18.3m	86
413C0024GY	60cm x linm	2,3
413C0036GY	91cm x linm	3,5
413C0048GY	122cm x linm	4,7

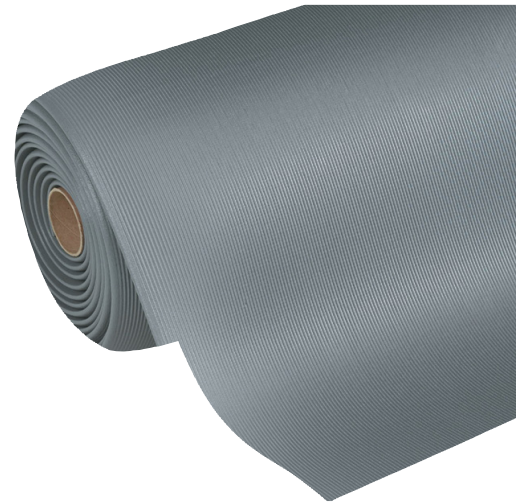

# 413 Gripper Sof-Tred™

## GENERAL DESCRIPTION

Type	Dry Areas - Dyna Shield™
Description	12.7 mm thick specially formulated compound with lengthwise corrugated rib pattern. Protective layer of exclusive Dyna-Shield™ extends service life.
Recommended use	Dry Areas
Surface	Lengthwise corrugated rib pattern
Category	Ergonomic, Anti-fatigue Safety Matting Medium duty
Colours	Black/Yellow, Grey
Edges	Bevelled edges on all sides

## TECHNICAL SPECIFICATIONS

Material	Microcellular vinyl
Backing	Microcellular PVC foam
Process	Foaming
Total weight	4 kg/m <sup>2</sup>
Overall thickness	12,7 mm

## TESTS

Compression deflection	U.S.	0.62 cm 0.77 cm
Slip rating	DIN 51130	R10
Sustainability	Recyclable material	
Foam battery	ASTM D3574	40 lb/in <sup>2</sup>
Abrasion resistance	ASTM D3884-01	4.9% 2.15%
Coefficient friction	ASTM C1028-96	1.00
Elongation	ASTM D412	126%
Breaking load	ASTM D412	24.5 lb
Tear Strength	ASTM D1004	10.6 lb
Hardness	ASTM D2240-02	15 Shore A
Surface flammability	ASTM D2859	Pass

## DIMENSIONS

Standard sizes	Full rolls	Custom lengths
60cm x 91cm	60cm x 18.3m	60cm x linm
91cm x 150cm	91cm x 18.3m	91cm x linm
	122cm x 18.3m	122cm x linm